


BBF XF SPECIFICATIONS

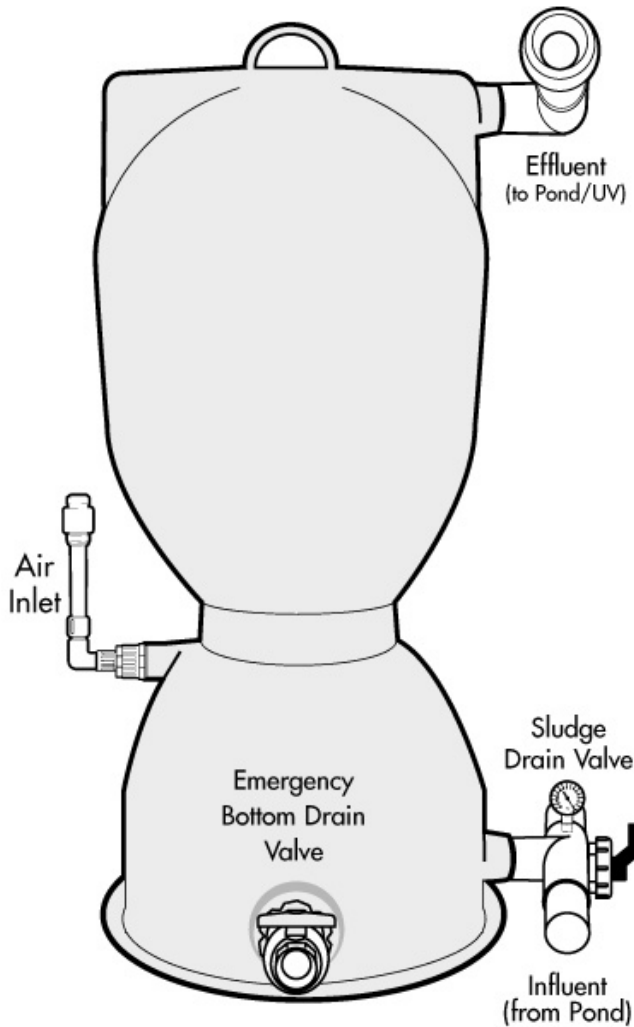

High Pressure Fiberglass Units

- Provides biological and mechanical filtration
- Uses low pressure, low horsepower pump
- Easy to install
- Closed filter easy to connect with UV
- Weather and salt resistant
- Superior solids removal
- Excellent nitrification
- No mechanical parts to wear out
- Small compact footprint
- Proven product with over 20 years in the field

FIBERGLASS MODELS	Max Flow Rate(gpm)	Cubic Feet Bead Media	Height / diameter (in)	Inlet and Outlet Sizes (in)	Backwash Water Loss (gallons)
XF 4000	30	2	53.5/26	1 1/2"	25
XF 6000	45	3	53.5/26	1 1/2"	25
XF 8000	60	4	63/33	2"	45
XF 10000	75	5	63/33	2"	45
XF 12000	90	6	78/36.5	3"	65
XF 20000	150	10	84/40	3"	150

XF fiberglass models have a max pressure of 15 psi