


HPPG-25 SPECIFICATIONS

Suflow rotometer are required to regulate the air flow from the air pump. The air injected into the system regulates the backwash frequency. These suflow kits are included with the purchase of the filter.

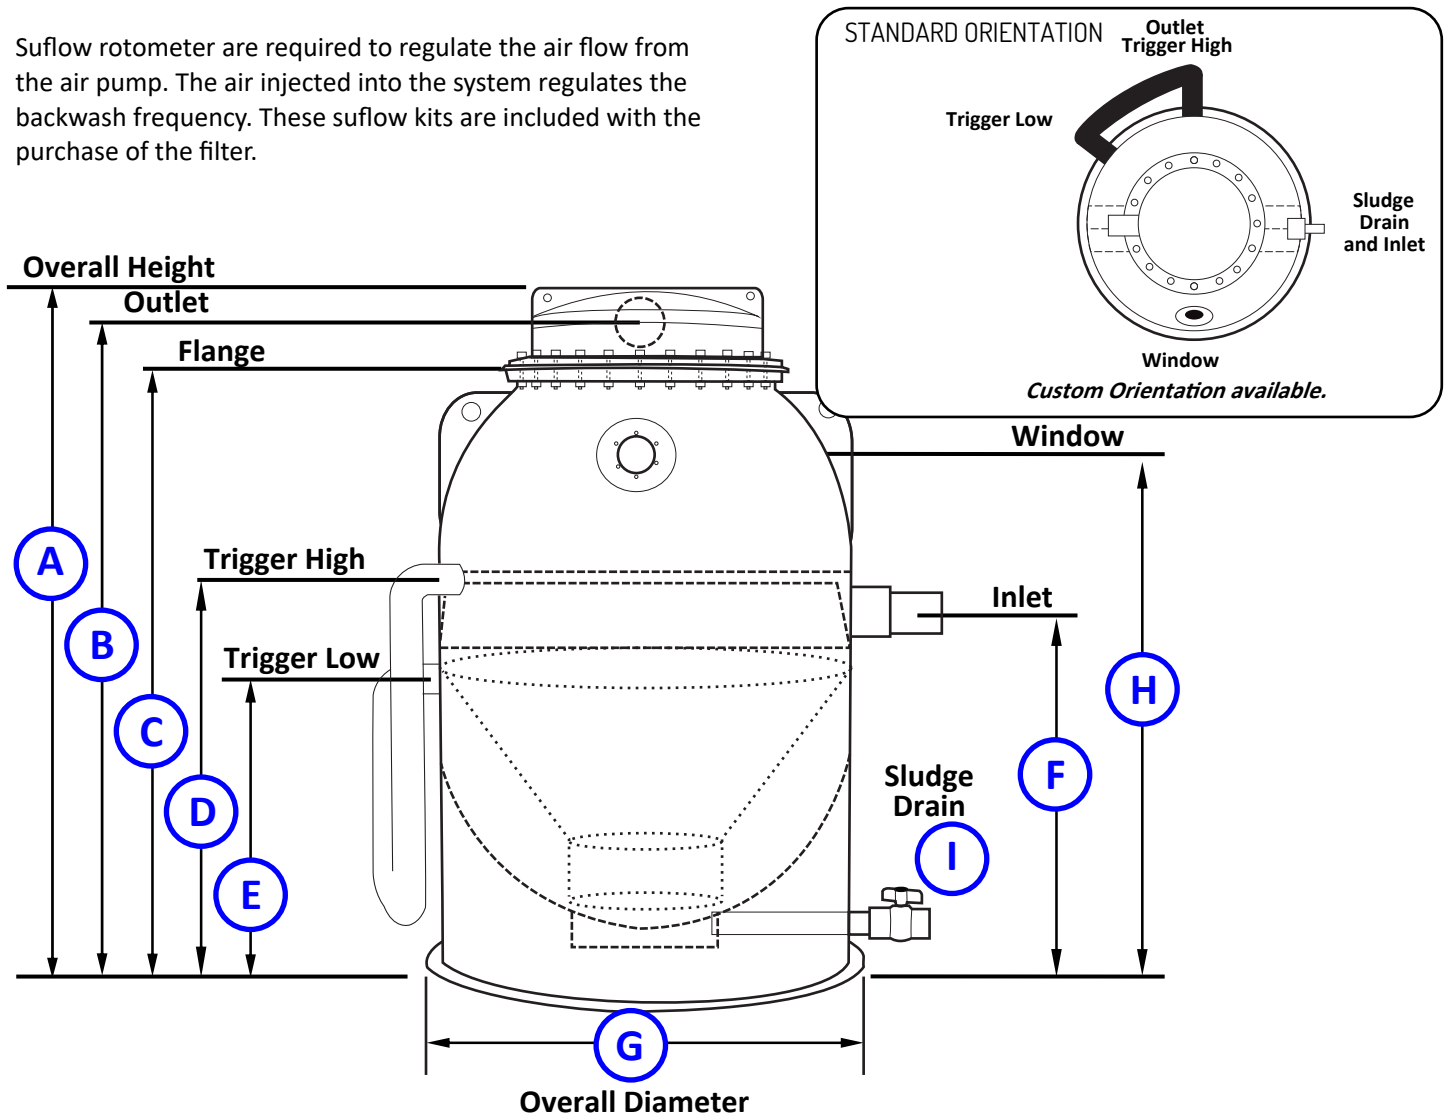

A	104"
B	94.5"
C	87.5"
D	49"
E	39.5"
F	60.25"
G	59"
H	68.5"
I	3.5"

Std. Pump HP	5 HP
Backwash Air Pump	18.8/ 10-9.4
Max Flow Rate	250-375 gpm
Ft ³ of Media	25
Ft ² of Surface Area	10000
Inlet Coupling	6" Fipt
Outlet Pipe	(2x) 6" Fipt
Inlet Valve	3" Fipt
Sludge Drain Valve	1.5" Fipt
Estimated Sludge Water Loss	30-60 gallons
Max Operating Pressure	20 PSI
Filter Weight/Shipping Weight	~1508 Lbs / 1700 Lbs

Filter shown for illustrative purposes only.

Drawing is NOT drawn to scale.