


# PBF-10 SPECIFICATIONS

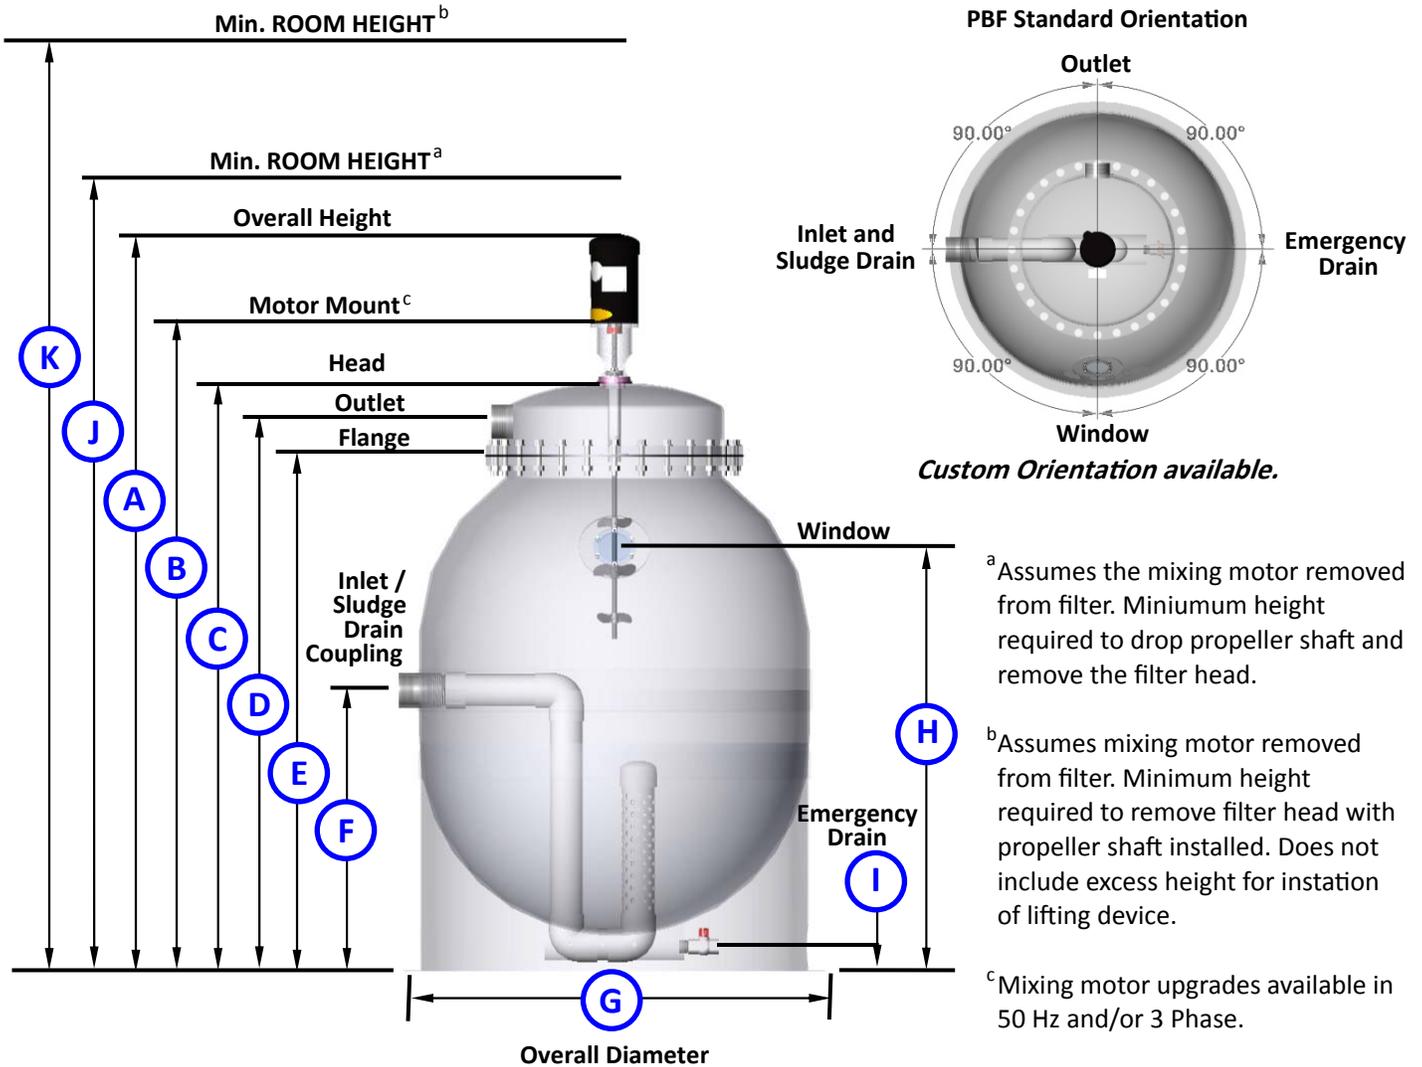

A	~86"
B	76"
C	67.5"
D	65"
E	60"
F	36"
G	40"
H	47.5"
I	3"
J	90"
K	8.5'

Std. Motor HP : Phase / Hz/ V <sup>c</sup>	1 HP: 1 / 60 / 115 / 208-230
Std. Motor Amp Draw <sup>c</sup>	14.0/ 6.80 - 7.00
Max Flow Rate	100 gpm
Ft <sup>3</sup> of Media	10
Ft <sup>2</sup> of Surface Area	4000
Inlet/Sludge Drain Coupling	2" Fipt
Outlet Pipe	(1x) 3" Fipt
Emergency Drain Valve	1" Fipt
Inlet Valve	2" Fipt
Sludge Drain Valve	1.25" Fipt
Backwash Water Loss	10-30 gallons
Max Operating Pressure	20 PSI
Shipping Weight	750 Lbs

**Filter shown for illustrative purposes only.**

**Drawing is NOT drawn to scale.**