


ASTTM PBF-100S SPECIFICATIONS

ASTFILTERS.COM

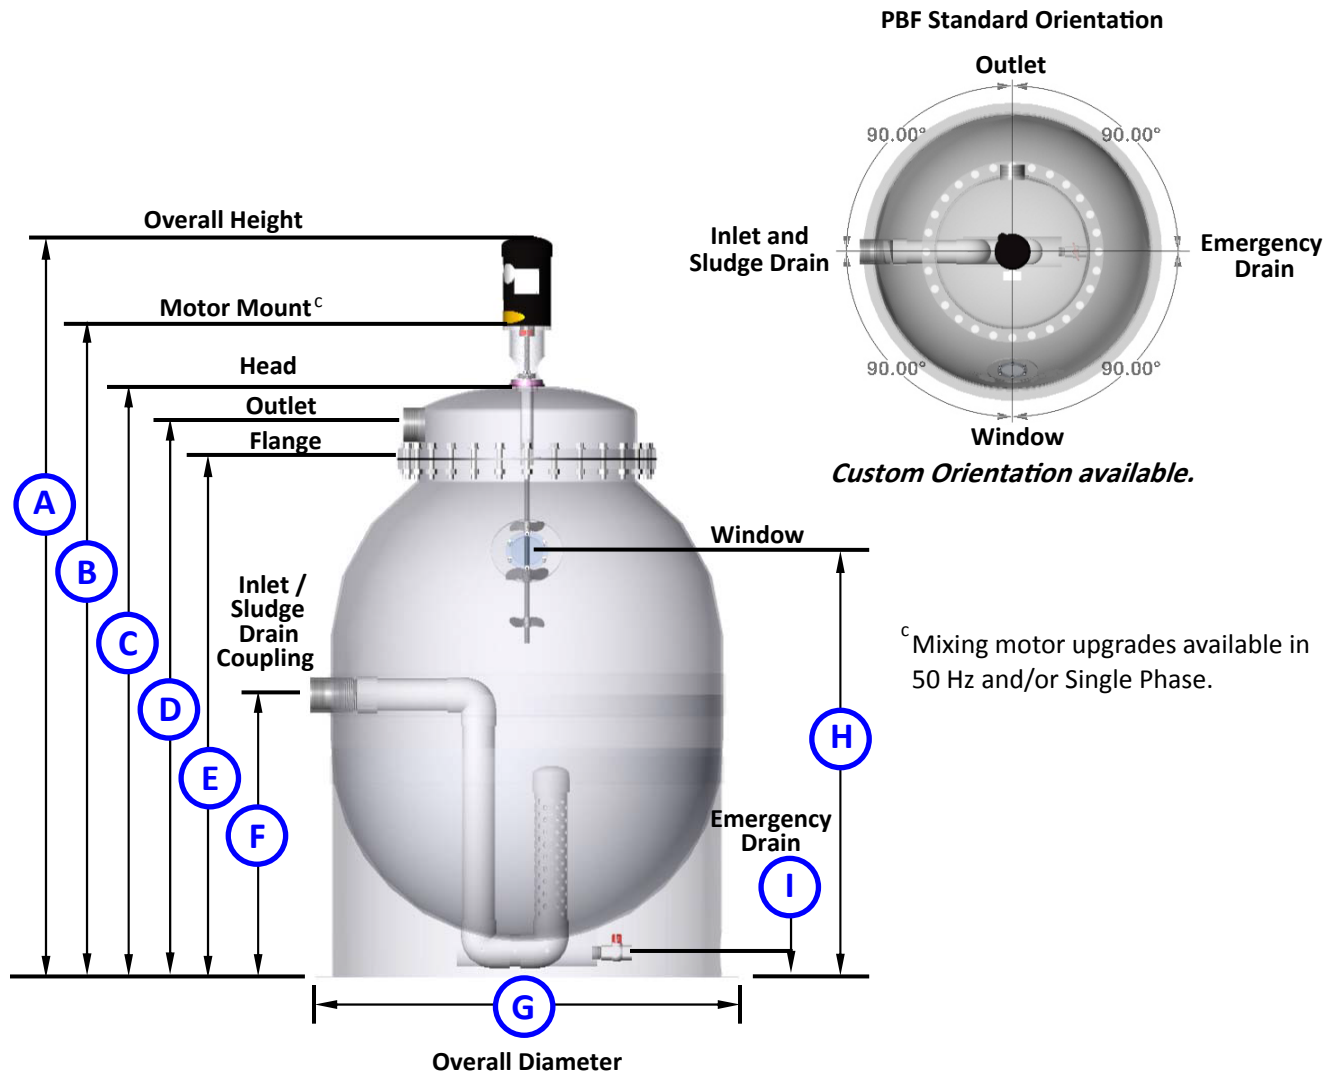

A	~160"
B	135"
C	127"
D	120.5"
E	112"
F	58"
G	92"
H	87"
I	~5.5"

Std. Motor HP : Phase / Hz/ V ^c	10 HP: 3 / 60 / 208 / 230-460
Std. Motor Amp Draw ^c	28 / 26 - 13
Max Flow Rate	1200 gpm
Ft ³ of Media	100
Ft ² of Surface Area	40000
Inlet/Sludge Drain Coupling	12" Flange
Outlet Pipe	(2x) 8" Fipt, 180° apart
Emergency Drain Valve	2" Fip
Inlet Valve	12" Flange
Sludge Drain Valve	12" Flange
Backwash Water Loss	200-300 gallons
Max Operating Pressure	20 PSI
Shipping Weight	~6100 Lbs

Filter shown for Illustrative Purposes only.

Drawing is NOT drawn to scale.

AST Aquaculture Systems Technologies, LLC

108 Industrial Avenue
New Orleans, LA 70121
www.astfilters.com

info@astfilters.com
Phone: 504.837.5575
Toll-Free: 800.939.3659
Fax: 504.837.5585