


PBF-25 SPECIFICATIONS

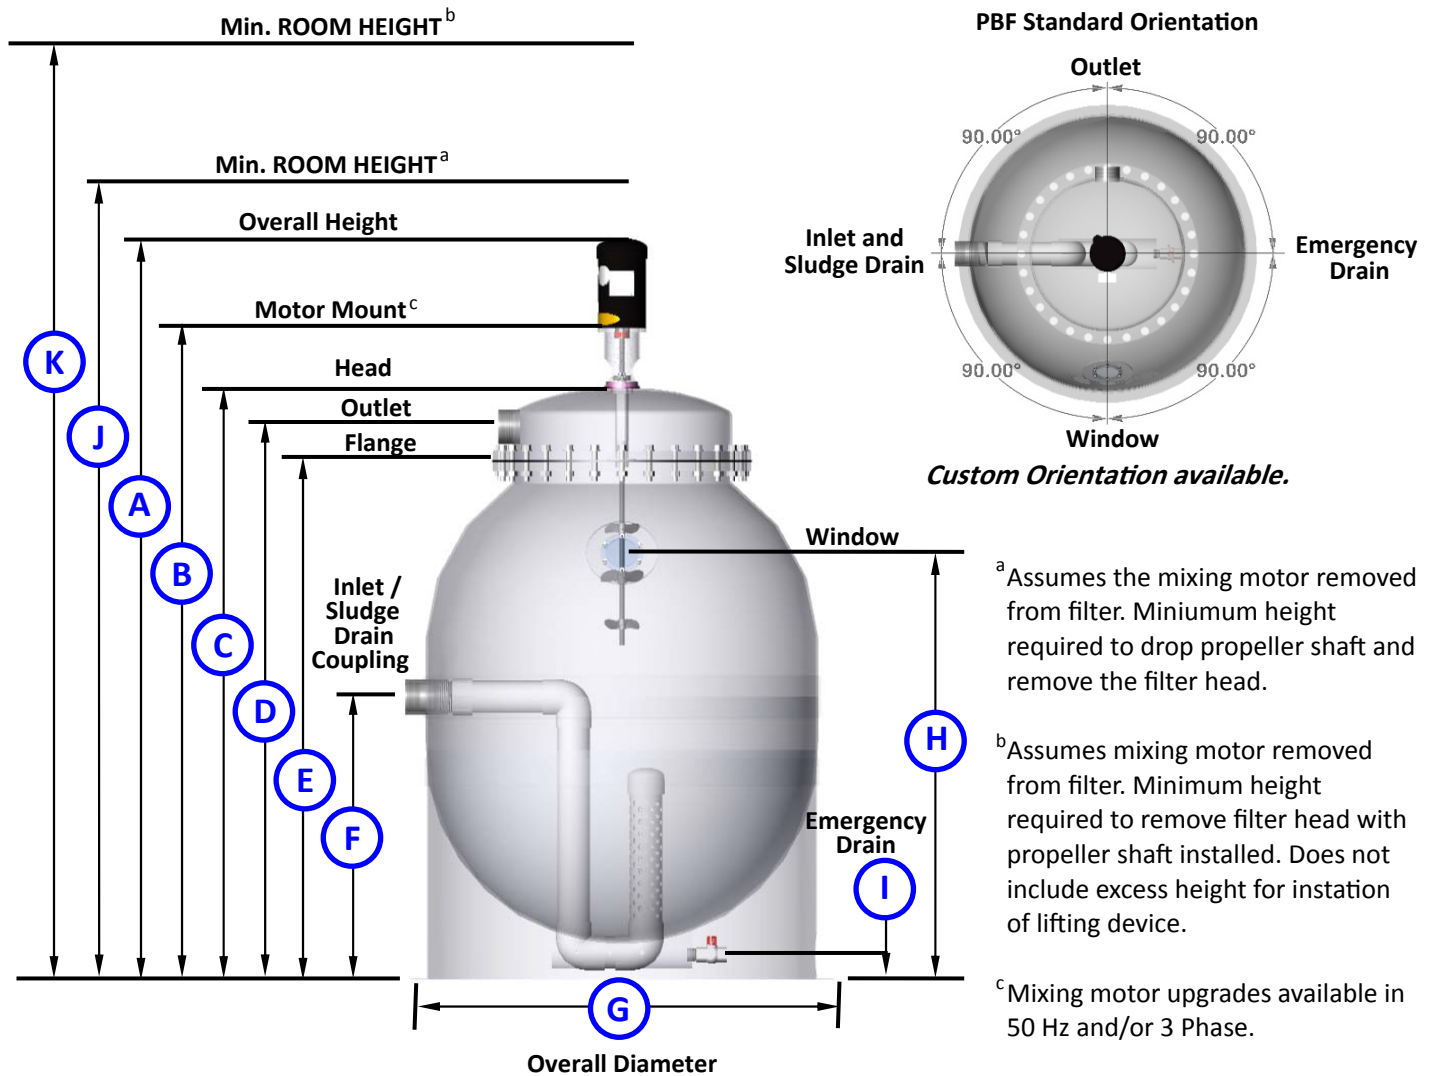

| | | | |
|---|-------|--|------------------------------|
| A | ~104" | Std. Motor HP : Phase / Hz/ V ^c | 2 HP: 1 / 60 / 115 / 208-230 |
| B | 92" | Std. Motor Amp Draw ^c | 18.8/ 10-9.4 |
| C | 83.5" | Max Flow Rate | 200 gpm |
| D | 81" | Ft ³ of Media | 25 |
| E | 76" | Ft ² of Surface Area | 10000 |
| F | 40.5" | Inlet/Sludge Drain Coupling | 3" Fipt |
| G | 59" | Outlet Pipe | (1x) 3" Fipt |
| H | 54.5" | Emergency Drain Valve | 1" Fipt |
| I | 3.5" | Inlet Valve | 3" Fipt |
| J | 108" | Sludge Drain Valve | 1.25" Fipt |
| K | 10.5' | Backwash Water Loss | 30-60 gallons |
| | | Max Operating Pressure | 20 PSI |
| | | Shipping Weight | 1700 Lbs |

**Filter shown for
Illustrative
Purposes only.**

**Drawing is NOT
drawn to scale.**