


# PBF-5 SPECIFICATIONS

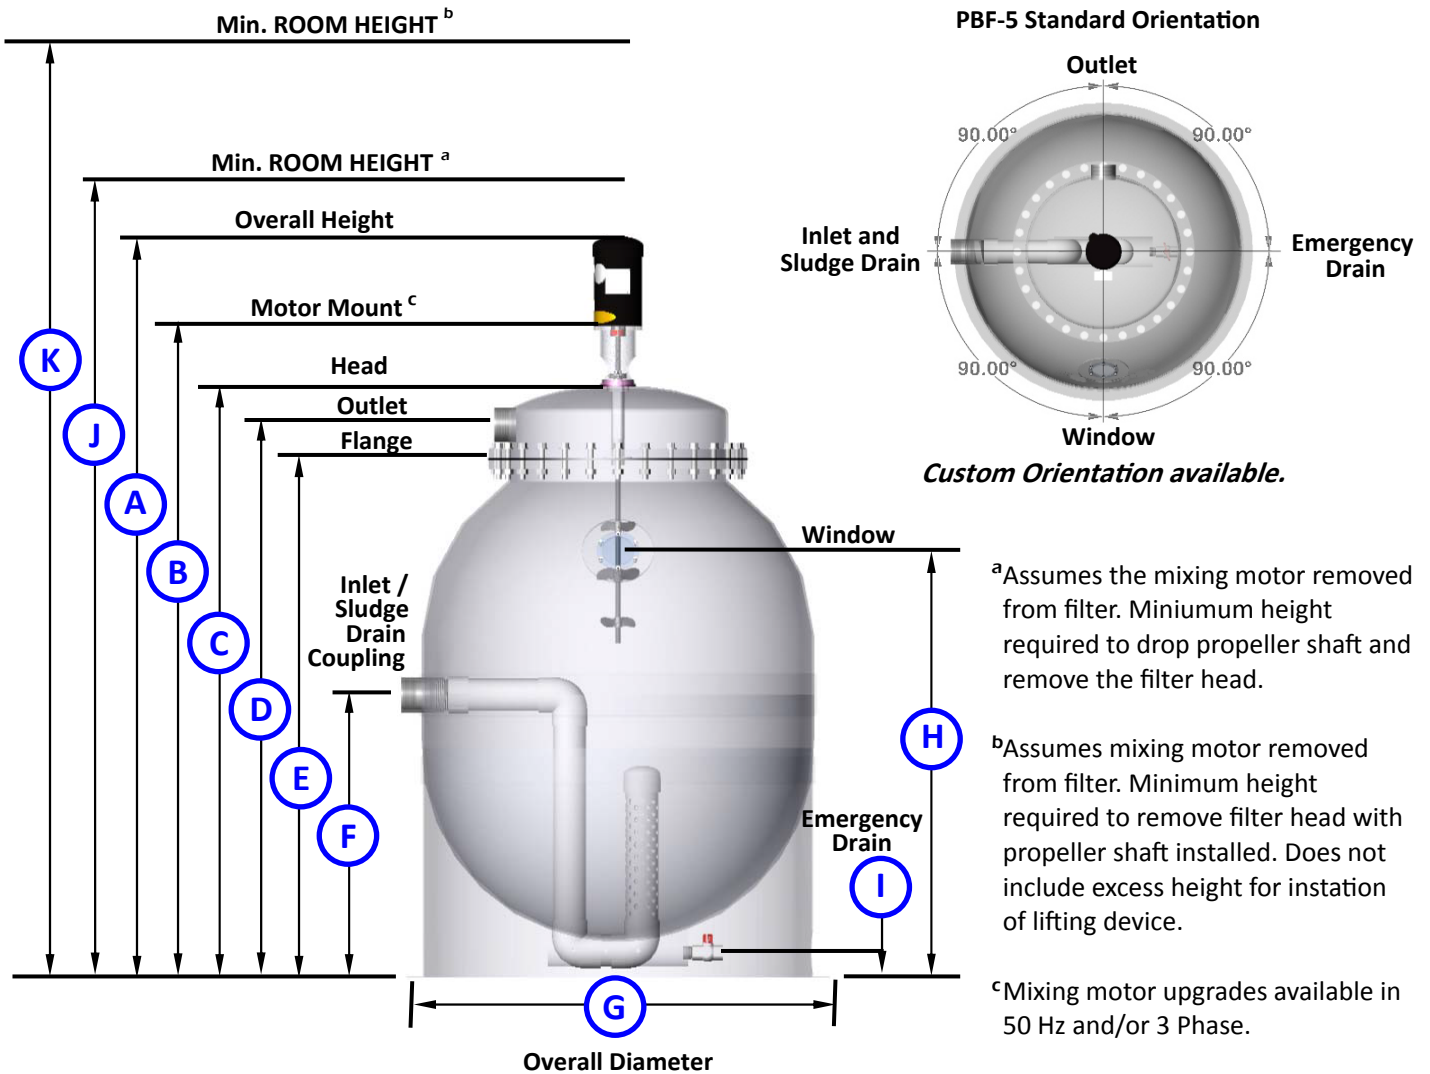

A	77.5"
B	68"
C	60"
D	56"
E	52"
F	30"
G	34"
H	38.5"
I	3"
J	82"
K	7.5'

Std. Motor HP : Phase / Hz/ V <sup>c</sup>	1/2 HP: 1 /60 / 115 / 208-230
Std. Motor Amp Draw <sup>c</sup>	7.40 / 3.6 - 3.70
Max Flow Rate	50 gpm
Ft <sup>3</sup> of Media	5
Ft <sup>2</sup> of Surface Area	2000
Inlet/Sludge Drain Coupling	1.5" Fipt
Outlet Pipe	(1x) 2" Fipt
Emergency Drain Valve	1" Fipt
Inlet Valve	1.5" Fipt
Sludge Drain Valve	1.25" Fipt
Backwash Water Loss	6-10 gallons
Max Operating Pressure	20 PSI
Shipping Weight	425 Lbs

**Filter shown for Illustrative Purposes only.**

**Drawing is NOT drawn to scale.**