


PBF-50 SPECIFICATIONS

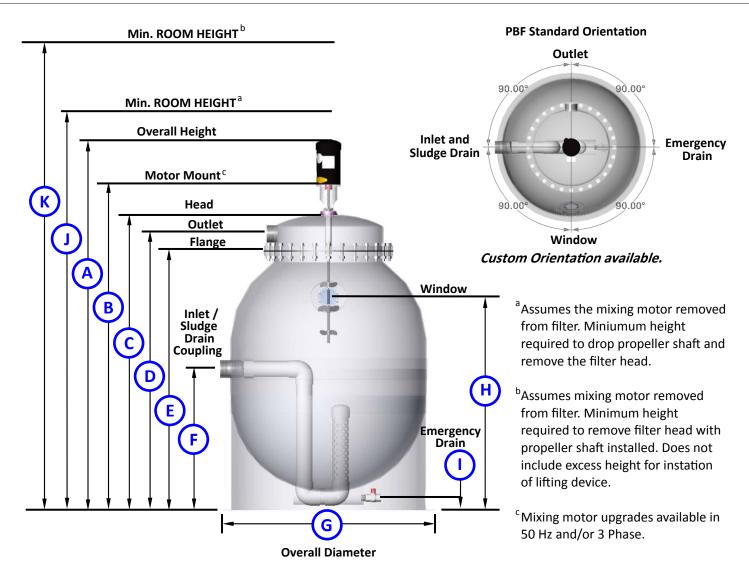

_	· •
(A	117"
В	104"
С	95.5"
D	91.5"
E	85.5"
F	52"
G	72"
Н	73"
1	4"
J	122"
(K	11.5′

Std. Motor HP: Phase / Hz/ V ^c	5 HP: 3 / 60 / 208 / 230-460
Std. Motor Amp Draw ^c	15/ 13.2 - 6.6
Max Flow Rate	300 gpm
Ft ³ of Media	50
Ft ² of Surface Area	20000
Inlet/Sludge Drain Coupling	4"Fipt
Outlet Pipe	(2x) 4"Fipt, 180° apart
Emergency Drain Valve	1.5" Fipt
Inlet Valve	4" Fipt
Sludge Drain Valve	4" Fipt
Backwash Water Loss	50-150 gallons
Max Operating Pressure	20 PSI
Filter Weight/Shipping Weight	~2610 Lbs / 3250 Lbs

Filter shown for Illustrative Purposes only.

Drawing is NOT drawn to scale.

108 Industrial Avenue New Orleans, LA 70121 www.astfilters.com info@astfilters.com Phone: 504.837.5575 Toll-Free:800.939.3659 Fax: 504.837.5585